


TECHNICAL SPECIFICATIONS

Tractor	Model Compatibility	5E Series
		4WD Axle and 2WD Global Axle
		One dedicated SCV required for Front Hitch operation
Front Hitch	Hitch Geometry	CAT II front Hitch
	Lift Capacity	1800 kg at Hitch ball
	Draft Sensing	NA
	Lift Range, mm	Max.850 mm
		Min.230 mm
	Lower Link	Folding arms and Cat 2 automatic hooks
	Transport Lock	Hydraulic lock during transport @ operator station
	Lower link Type	Rigid links with a span of 870 mm
Front PTO	PTO RPM	1000 RPM @ 2100 ERPM
	Number of Splines	6 Splines
	Direction of PTO shaft Rotation	Counter clockwise while looking at shaft from front side of tractor
	Operation	With ON / OFF switch at operator station
2000 hrs warranty on FHFPTO		

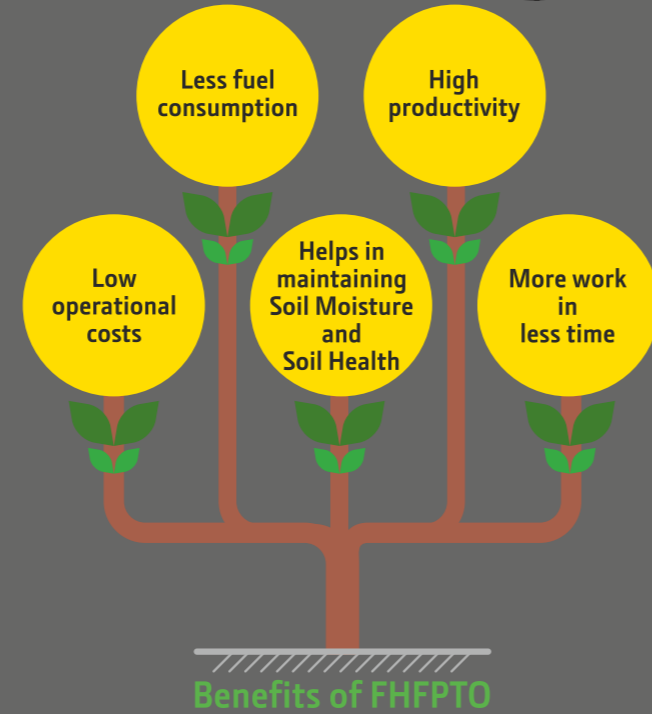

John Deere Genuine Parts

| Economical | Reliable |
| Easily available |



John Deere India Private Limited
3rd floor, Tower-15, Cybercity, Magarpatta City,
Hadapsar, Pune - 411013. Maharashtra. | www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office. Sales & Service through John Deere authorized dealers only.

Please note: Improvement in the product is a continuous process. Hence the information given in this brochure is subject to change without prior notice. Accessories shown are not the part of standard equipment.



GREENSYSTEM™

Double Performer

Two operations in single pass



*Conditions apply.

GREENSYSTEM™

Specially designed for
John Deere 5000 series tractors

Achieve your dreams, twice the more!

Cultivating a farm is like seeing a dream grow – but dreams are seldom one at a time. Our aspirations are many at once, so why shouldn't our achievements be? John Deere brings you an implement that does just the same... the versatile, **Front Hitch Front PTO**.

Front Hitch Front PTO helps you do twice the work at once. It helps you attach one implement at the front, while there is another implement attached at the back of the tractor. Now you can do tilling and seeding, harvesting or post harvest tillage all in one go! So work for half the time and double the gains!



Lift Capacity 1800 Kg
- To lift heavy implement



Electrically operated front PTO
with safety interlock
- Ease of operation and safety



Front Hitch ON/OFF valve
- Ensures safety during transportation



Foldable lower links



Wet clutch operated front PTO
- More Life