

Introducing...
Super Speciality
Tractor

Narrow in width. Wide on applications.

New
28 HP 20.9 kW
Model 3028 EN



*Conditions apply.



4 Wheel Drive



FNR Lever



Sync Reverser



Narrow Track Width



Powerful Dual PTO

*Zindagi ka
Best Decision!™*



JOHN DEERE

TECHNICAL SPECIFICATIONS

ENGINE

Type : 28 HP (20.9 kW), 2800 RPM,
3 Cylinders, Inline FIP,
Coolant cooled with over flow
reservoir, Naturally aspirated

Air filter : Dry type, dual element

TRANSMISSION

Clutch : Single

Gear box : 8 Forward + 8 Reverse, FNR
Sync Reverser / Collar Reverser

Speeds : Forward 1.6 - 19.7 kmph
Reverse 1.6 - 19.7 kmph

BRAKES

: Oil Immersed Disc Brakes

HYDRAULICS

Maximum Lifting
capacity : 910 kgf

STEERING

Type : Power

POWER TAKE OFF

Type : Independent, 6 Splines

Dual PTO : 540 @ 2490 ERPM
540 @ 1925 ERPM

WHEELS AND TYRES

Front : 180/85 - D12

(Optional) 6 x 14 (0.15 x 0.36 m)

Rear : 8.3 x 24 (0.21 x 0.61 m)

(Optional) 9.5 x 24 (0.24 x 0.61 m)

FUEL TANK

Capacity : 32 L

ELECTRICAL SYSTEM

: 55 Ah, 12 V battery,
50 Amp. alternator
12 V, 1.2 kW Starter motor

DIMENSIONS AND WEIGHT

Total weight : 1070 kg

Turning radius with brakes : 2300 mm

Turning radius without brakes : 3000 mm

ACCESSORIES

• Ballast weights • Trailer brake valve

FACTORY FITTED OPTIONS

• Roll over protection
structure (ROPS)

• Draft control lever

• Seat with seat belt

• Hydraulic auxiliary pipe



FEATURES

• Sync reverser • Finger guard • FNR NSS • PTO NSS


• Underhood with down draft exhaust muffler

• Water separator • Digital hour meter

• Radiator screen • Metal face seal

Note: 5 years warranty consist of 2 years / 2000 hours of
standard warranty and extended warranty of 3 years / 3000 hours.

High
Lifting Capacity
**910
kgf**

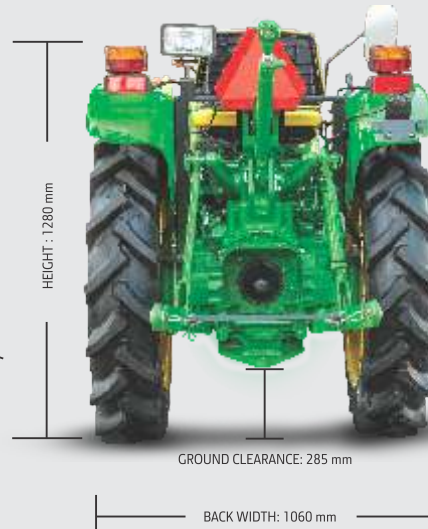

Specially designed **GREENSYSTEM** implements for Model 3028 EN



Rotary Tiller



Cultivator



2 Bottom Ridger

Implement types and working width

Rotary Tiller	- 16 Blades (800 mm), 20 Blades (1000 mm), 24 Blades (1200 mm)
Cultivator	- 5 tynes, 880 mm
Cultivator (Foldable frame)	- 7 tynes, 1280 mm
Ridger	- 2 Bottom, Adjustable

John Deere Genuine Parts

| Economical | Reliable | Easily available |



Note : All the options / features may not be available in a single variant.

John Deere India Private Limited

3rd floor, Tower-15, Cybercity, Magarpatta City, Hadapsar,
Pune - 411013. Maharashtra. www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office.



• Tractors • Implements
• Harvesters • Finance



JOHN DEERE