

Now with
Higher Lift Capacity

New **60 HP** 44.7 kW **Model 5060 E**



Also available with
JDLINK™

...The Next Generation Tractor Technology



Tilt Steering

For operator comfort
adjustable up to 25° tilt,
with lock latch



EQRL

Easy hitching and
usage of implement
through EQRL switches



Smart Brakes

Self adjusting, self equalising,
hydraulically actuated,
oil immersed disc brakes



Hood Lock



Mobile Charging Point with Holder

*Zindagi ka
Best Decision!™*



JOHN DEERE

*Conditions apply

TECHNICAL SPECIFICATION

ENGINE

Type	: 60 HP (44.7 kW), 2400 RPM, 3 cylinder, Direct injection, Turbo charged, Rotary FIP, liquid cooled with over flow reservoir
Air filter	: Dry type, dual element

TRANSMISSION

Clutch	: Dual
Gear Box	: 9 Forward + 3 Reverse
Speeds	: Forward 2.3 to 32.8 kmph Reverse 3.9 to 25.4 kmph

BRAKES

	: Self Adjusting, Self Equalising, Hydraulically Actuated, Oil immersed disk brakes
--	---

HYDRAULICS

Maximum Lifting capacity	: 2000 kgf
3 Point linkage	: Category II Automatic depth & draft control (ADDC)

STEERING

Type	: Power
Steering Column	: Tiltable up to 25° with lock latch

POWER TAKE OFF

Type	: Independent , 6 splines
RPM	: 540 @ 2376 ERPM

FUEL TANK CAPACITY

	: 68 L
--	--------

WHEELS AND TYRES

Front	: 6.5 x 20 (0.17 x 0.51 m), 8 PR
Rear	: 16.9 x 30 (0.43 x 0.76 m), 12 PR

ELECTRICAL SYSTEM

	: 88 Ah, 12 V battery, 40 Amp. Alternator, 2.5 KW starter motor
--	---

DIMENSIONS AND WEIGHT OF TRACTOR

Total weight	: 2130 kg
Wheel base	: 2050 mm
Overall length	: 3540 mm
Overall width	: 1885 mm
Ground clearance	: 0470 mm
Turning radius with brakes	: 3181 mm

ACCESSORIES*

- Ballast Weight • Canopy • Canopy Holder
- Wagon Hitch • Draw Bar

OPTIONS

- Adjustable front axle
- Heavy duty front axle
- Reverse PTO- (Std + Reverse)
- Dual PTO- (Std + Economy)
- EQRL System
- Synchromesh Transmission- (TSS)
- Selective Control Valve (SCV)

ADDITIONAL FEATURES


- Single Piece Hood with Gas Strut Mechanism
- Side Bar, Exhaust Muffler Guard & Finger Guard
- Water Bottle Holder
- Mobile Charging Point with Holder

Also available with PR transmission and 4WD


Note: 5 years warranty consist of 2 years / 2000 hours of standard warranty and extended warranty of 3 years / 3000 hours.

Note: Some of the options may not be available in all combinations. For variants please check with your nearest dealer.

New 60 HP 44.7 kW Model 5060 E

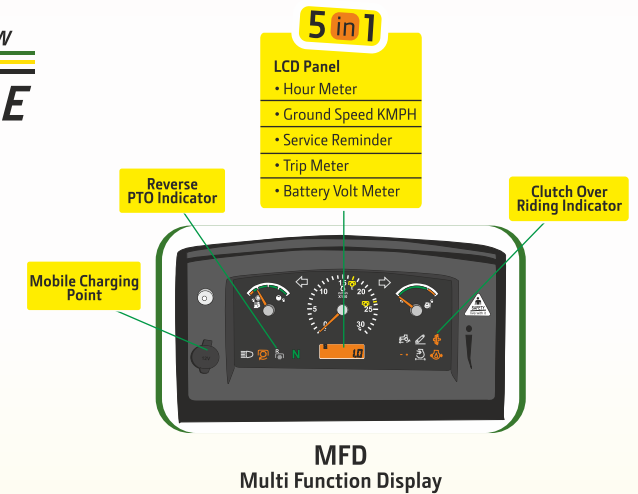

Dry type air filter
Ease of maintenance and longer engine life



Planetary Gear with Straight Axle



Oil jet for piston cooling



Go Home Feature
Reach home safely in the dark



High torque reserve
More productivity



Top Shaft Lubrication

John Deere Genuine Parts

I Economical I Reliable I
I Easily available I



John Deere India Private Limited

3rd floor, Tower-15, Cybercity, Magarpatta City, Hadapsar, Pune - 411013. Maharashtra. www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office.



- Tractors • Implements
- Harvesters • Finance



JOHN DEERE